



## THIS DEVICE IS FM APPROVED

The pressure vs. flow rate data developed within this flow chart is based on the average K-factor measured during laboratory testing. This data has been determined to be within the acceptable limitations for accuracy. It is the user's responsibility to verify that the correct chart and column are being used.

**HM2H | 2½" Hose Monster Model II or Flusher with flow splitter (HM2H, HM2HF)** Use this column if the Pitotless Nozzle is connected to the 2½" Hose Monster or Flusher. The built-in pitot or flow splitter must be installed for accuracy.

**OA | Open Atmosphere** Use this column when the Pitotless Nozzle is connected directly to a test header or hydrant flowing openly to atmosphere.

## GET THE MOST OUT OF YOUR HOSE MONSTER™ HARDWARE

### FIRE PUMP TESTING SOFTWARE

Professional-grade software that helps you work better! Keep your reports clean, your results accurate, and your process streamlined with Hose Monster's FPT Software.

## 1" PITOTLESS NOZZLE™

### PN1THD—GPM FLOW CHART

FC-PN1THD.2021.09.21.MA

	HML	OA
PSI	GPM	GPM
3	48	48
4	55	55
5	62	62
6	68	68
7	73	73
8	78	78
9	83	83
10	87	88
11	92	92
12	96	96
13	100	100
14	103	104
15	107	107
16	110	111
17	114	114
18	117	118
19	120	121
20	123	124
21	126	127
22	129	130
23	132	133
24	135	136
25	138	139
26	141	141
27	143	144
28	146	147
29	149	149

	HML	OA
PSI	GPM	GPM
30	151	152
31	154	154
32	156	157
33	159	159
34	161	162
35	163	164
36	166	166
37	168	168
38	170	171
39	172	173
40	175	175
41	177	177
42	179	180
43	181	182
44	183	184
45	185	186
46	187	188
47	189	190
48	191	192
49	193	194
50	195	196
51	197	198
52	199	200
53	201	202
54	203	204
55	205	205
56	207	207

	HML	OA
PSI	GPM	GPM
57	208	209
58	210	211
59	212	213
60	214	215
61	216	216
62	217	218
63	219	220
64	221	222
65	223	223
66	224	225
67	226	227
68	228	228
69	229	230
70	231	232
71	233	233
72	234	235
73	236	237
74	237	238
75	239	240
76	241	241
77	242	243
78	244	245
79	245	246
80	247	248

MANUFACTURED BY THE  
HOSE MONSTER™ COMPANY

LEARN MORE AT [HOSEMONSTER.COM/RESOURCES](https://www.hosemonster.com/resources)

# PITOTLESS NOZZLE™

## THREADED INSTRUCTIONS

The Pitotless Nozzle™ Threaded (PN#THD) must be used in conjunction with the 2½" Hose Monster Model II (HM2H, HM2HF) or attached directly to a hydrant or test header valve discharging into open atmosphere.

*Note: If you intend to use the Pitotless Nozzle with the Little Hose Monster (HML), then a Pitotless Nozzle Grooved (PN#GRV) is required. Do not use the Pitotless Nozzle Threaded (PN#THD) with the Little Hose Monster. Call us if you are considering a configuration not listed here.*

## PITOTLESS NOZZLE™ SETUP

The gauge connection on the Pitotless Nozzle™ is a factory-installed male end of a quick-disconnect coupling. One female counterpart is included, and additional ones can be purchased separately. Attach the female end of the quick-disconnect coupling directly to the gauge or remote reader adapter, and use the quick-disconnect feature to attach and remove. Do not remove the male quick-disconnect from the Pitotless Nozzle as it will damage the threads on the Pitotless Nozzle.

We recommend a gauge with an accuracy rating of 0.5% or better and of a suitable range.


## PITOTLESS NOZZLE™ USE

### WITH THE MODEL II, 2½" HOSE MONSTER™ OR FLUSHER

Insert the male outlet of the Pitotless Nozzle into the swivel coupling of the Hose Monster. Hand-tighten plus about a quarter-turn using a rocker lug spanner wrench on the swivel coupling and a pin lug spanner wrench (WSPA104) for a holdback on the Pitotless Nozzle. Attach the male end of a hose into the swivel coupling on the Pitotless Nozzle. Hand-tighten plus about a quarter-turn using spanner wrenches. The pitot/flow splitter must remain on either unit in order to collect accurate flow rates. Make sure the hose lies flat and is not twisted.

### ON A HYDRANT OR TEST HEADER VALVE

The Pitotless Nozzle must be attached securely to a pump test header valve or hydrant. Secure the female swivel coupling of the Pitotless Nozzle directly to a hydrant nozzle or test header valve. The Pitotless Nozzle points in the direction the water will flow. Clear water discharge path.

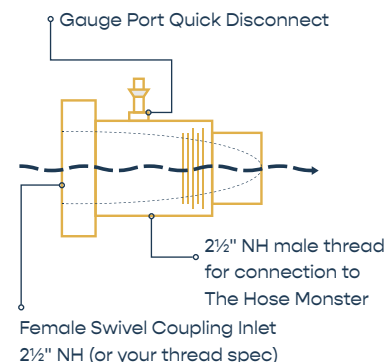

## WARNING

- **Do not** attach the Pitotless Nozzle™ to the end of a hose unless the Hose Monster is attached or it is **permanently** secured.
- **Do not** attach a hose to the male outlet end of the Pitotless Nozzle™ **under any circumstance**. The backpressure will distort flow rate reading.
- **Do not** remove the gauge port quick-disconnect fitting. The aluminum threads **will be damaged**. Contact Hose Monster™ for any repairs.

LHM			OA		
PSI	GPM	GPM	PSI	GPM	GPM
10	533	282	41	1080	570
11	559	295	42	1093	577
12	584	308	43	1106	584
13	608	321	44	1119	591
14	631	333	45	1131	597
15	653	345	46	1144	604
16	675	356	47	1156	610
17	695	367	48	1169	617
18	716	378	49	1181	623
19	735	388	50	1193	630
20	754	398	51	1205	636
21	773	408	52	1216	642
22	791	418	53	1228	648
23	809	427	54	1239	654
24	826	436	55	1251	660
25	843	445	56	1262	666

## FLOW CHARTS

Pitotless Nozzle™ flow charts must be used to determine discharge flow rate. The use of flow charts of a different device or size will result in incorrect readings. Within the flow chart is a column for “Little Hose Monster” and one for “Open Atmosphere.” Use the “Little Hose Monster” flows if the Pitotless Nozzle™ is attached to a Little Hose Monster. Use the “Open Atmosphere” flows if the Pitotless Nozzle™ is attached directly on a hydrant or test header valve discharging out into the open.

Flow charts are provided with the Pitotless Nozzle, and additional copies are available on our website at [www.hosemonster.com](http://www.hosemonster.com)



Find this as well as other product guides at [www.hosemonster.com/resources](http://www.hosemonster.com/resources)